


## SOLYX®

## SX-1212 Wire Glass

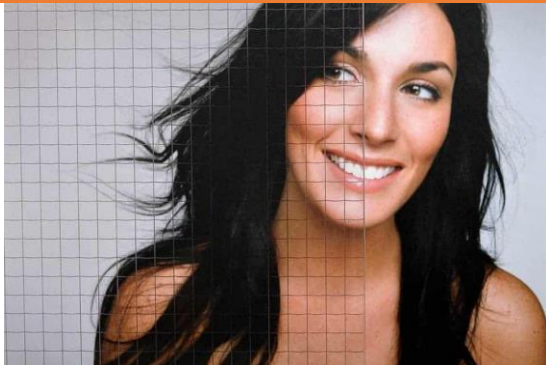

### Product Details

SX-1212 Wire Glass is a transparent polyester film with a decorative 1/2" square design simulating wire encapsulated safety glass. This film has a scratch-resistant coating; a solvent-based, acrylic, pressure-sensitive adhesive; and a 25 micron polyester liner.

### Flammability Rating

This product meets **Class B, s1, d0**, as specified in **BS EN 13501-1:2018**.

This product meets ASTM E84 and is classified as Class A as defined in NFPA 101, Life Safety Code®.

### Specification

Product Code	SX-1212
Film Type	Polyester
Adhesive Type	Pressure-sensitive
Usage	Interior
Available Roll Width(s)	59"
Thickness	100 micron
Visible Light Transmission	82%
UV Transmission	<1%
Infra-Red Transmission	90%

### Installation & Warranty

#### Installation

Installation should be in accordance with the manufacturer's installation instructions. This film is applied using the same methods used for installing window films.

#### Warranty

This product will be free from defects in material and manufacture for a period of five (5) years from the date of installation. See warranty information for specific details.

To ensure that **Genuine Solyx®** products have been installed, proof of a valid invoice number is required to validate your warranty. Scan the QR code below or visit [www.glassfilms.eu/validate](http://www.glassfilms.eu/validate) to validate.



### Product Construction

#### Face Film

100 micron Polyester

#### Adhesive

Solvent-Based Clear Acrylic, Pressure-Sensitive

#### Release Liner

25 micron Polyester

### Distribution & Contact Information

Solyx® Decorative Films are available through authorised window film installers and signage companies, or directly from Glass Films.

#### Contact Information

Glass Films

Tel: +44 (0) 800 970 6366

Email: [sales@glassfilms.eu](mailto:sales@glassfilms.eu)

Web: [www.glassfilms.eu](http://www.glassfilms.eu)