


SOLYX®

SX-5010 Sugar

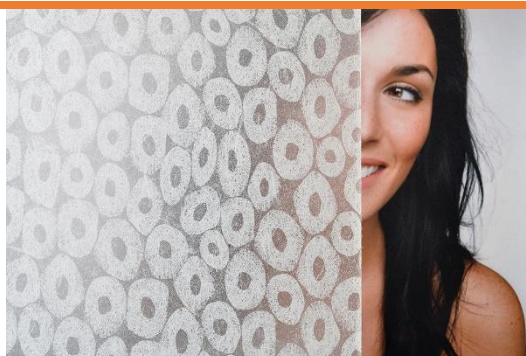

Product Details

SX-5010 Sugar. White random oval shapes approximately 1 inch in diameter with a subtle semi-transparent rice paper background. Allows for good light transmission and privacy. Film has sand-blasted texture. Order the length (quantity) needed x 59" wide.

Flammability Rating

This product meets **Class B, s1, d0**, as specified in **BS EN 13501-1:2018**.

Horizontal Burn (Flame Spread) ASTM D-635 inch
Less than 1.0
UL 94 Rating UL 94 Classification V-O
Class A 0 -25 Flame Spread Index 0 -450 Smoke
Developed Index

Specification

Product Code	SX-5010
Film Type	PET
Adhesive Type	Pressure-Sensitive
Usage	Interior
Available Roll Width(s)	59"
Thickness	102 micron
Visible Light Transmission	75%
UV Transmission	5%
U Value	.99
Total Solar Energy Rejected	36%
Total Solar Energy Absorbed	22%

Installation & Warranty

Installation

Installation should be in accordance with the manufacturer's installation instructions. This film is applied using the same methods used for installing window films.

Warranty

This product will be free from defects in material and manufacture for a period of five (5) years from the date of installation. See warranty information for specific details.

To ensure that **Genuine Solyx®** products have been installed, proof of a valid invoice number is required to validate your warranty. Scan the QR code below or visit www.glassfilms.eu/validate to validate.



Product Construction

Face Film

102 micron PVC

Adhesive

Clear, Pressure-sensitive

Release Liner

Silicone

Distribution & Contact Information

Solyx® Decorative Films are available through authorised window film installers and signage companies, or directly from Glass Films.

Contact Information

Glass Films

Tel: +44 (0) 800 970 6366
Email: sales@glassfilms.eu
Web: www.glassfilms.eu